


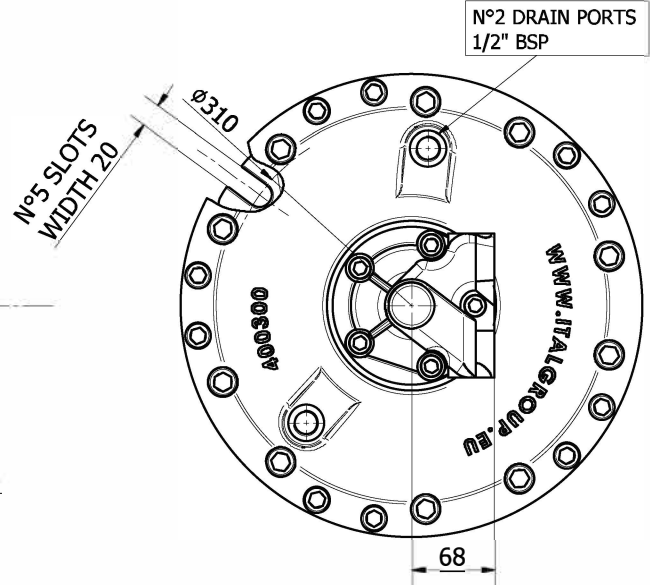


		350	400	500	600	700	800
DISPLACEMENT	[cc]	352	426	486	595	689	792
SPECIFIC TORQUE	[Nm/bar]	5,60	6,78	7,73	9,47	11	12,6
MAX. CONT. PRESSURE	[bar]	300	300	300	300	275	275
HYDROSTATIC TEST PRESSURE	[bar]	450	450	450	450	420	420
MAX. CONT. SPEED	[rpm]	800	700	550	500	450	450
PEAK SPEED (***)	[rpm]	1050	900	850	800	800	750
MAX. CONT. POWER (****)	[kW]	98	102	102	102	102	102
MAX. CONT. POWER WITH FLUSHING	[kW]	142	142	142	142	142	142
MAX. CASE PRESSURE	[bar]	10	10	10	10	10	10
DRY WEIGHT	[kg]	92	92	92	92	92	92
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70

- HCD rev.00 - March 2016

SHAFTS - HCD3


SHAFT CONFIGURATIONS

A0

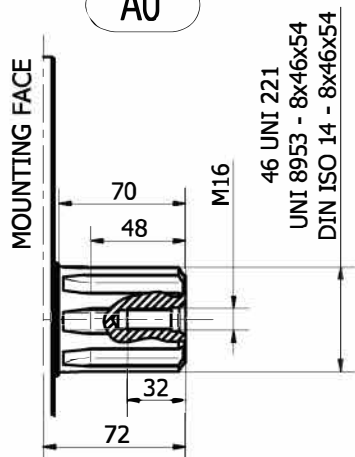


Available spline billet: **SB5**

A1

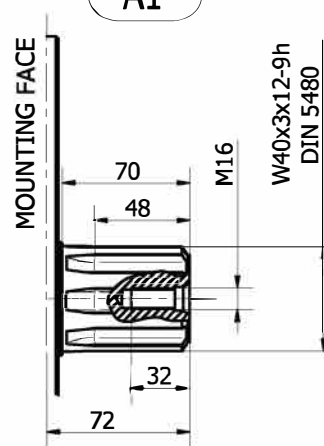


Available spline billet: **SB22**


A2

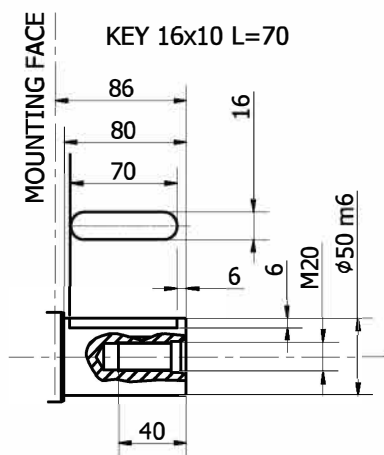


A3

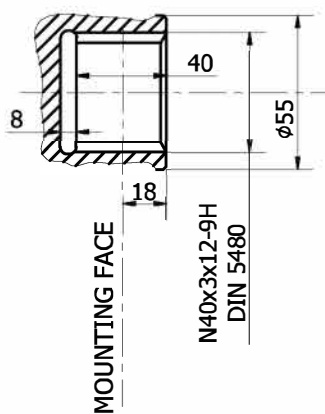

A31

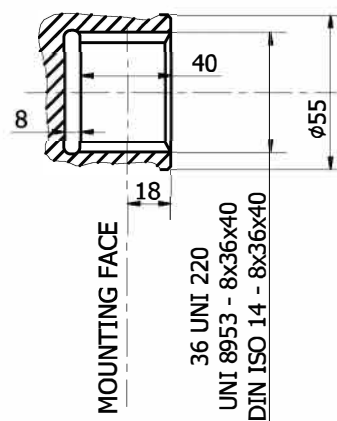

INSTALLATION DRAWING

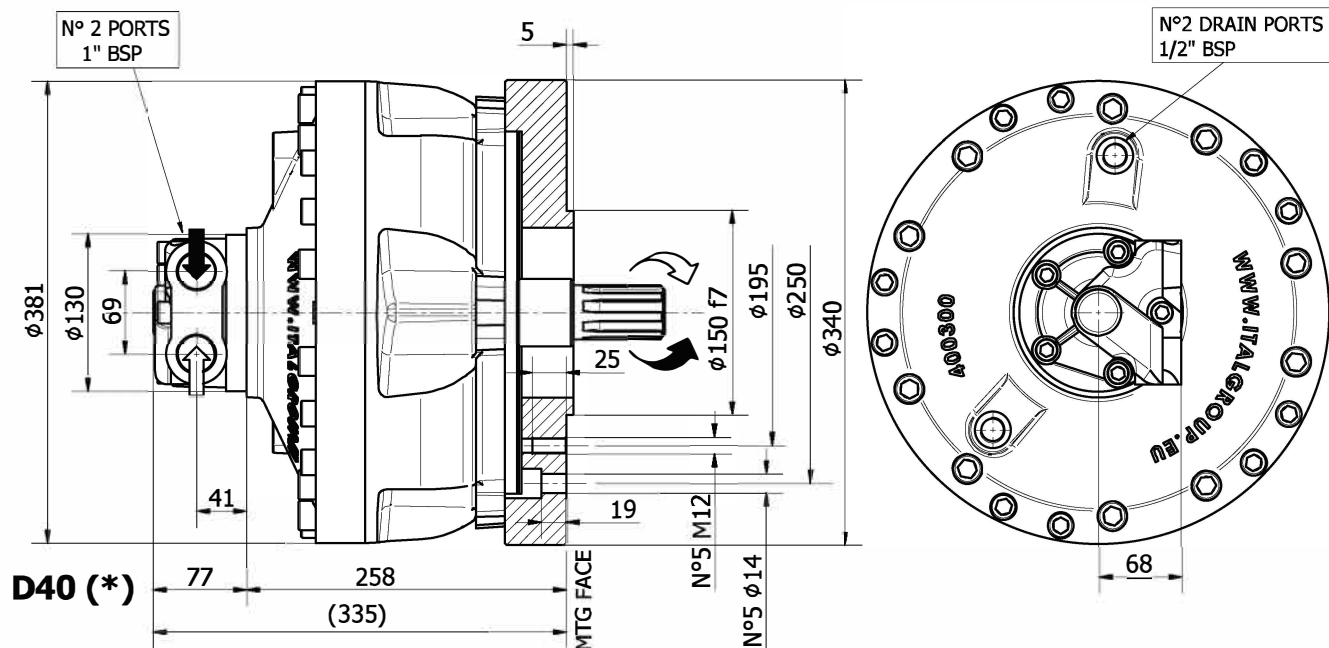

TECHNICAL DATA


		350	400	500	600	700	800
DISPLACEMENT	[cc]	352	426	486	595	689	792
SPECIFIC TORQUE	[Nm/bar]	5,60	6,78	7,73	9,47	11	12,6
MAX. CONT. PRESSURE	[bar]	300	300	300	300	275	275
HYDROSTATIC TEST PRESSURE	[bar]	450	450	450	450	420	420
MAX. CONT. SPEED	[rpm]	800	700	550	500	450	450
PEAK SPEED (***)	[rpm]	1050	900	850	800	800	750
MAX. CONT. POWER (****)	[kW]	98	102	102	102	102	102
MAX. CONT. POWER WITH FLUSHING	[kW]	142	142	142	142	142	142
MAX. CASE PRESSURE	[bar]	10	10	10	10	10	10
DRY WEIGHT	[kg]	92	92	92	92	92	92
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70

- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 82-83) for differents distributor interfaces.
- (**) Please refer to the hydraulic fluid recommendations (pag. 8-9).
- (***) Do not exceed maximum continuous power with flushing (pag. 11).
- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.

SHAFTS - HCD3 / G2


SHAFT CONFIGURATIONS

A0

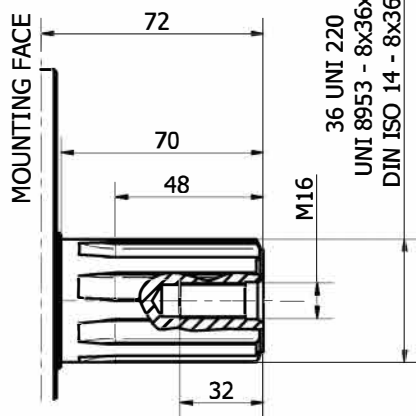


Available spline billet: **SB3**

A1

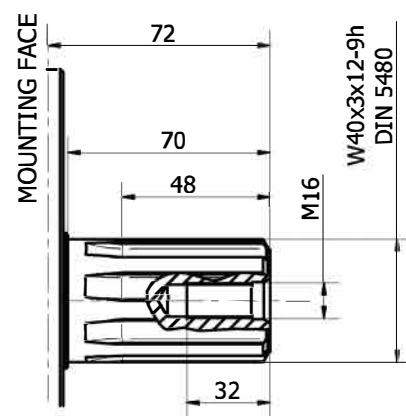


Available spline billet: **SB22**


A2

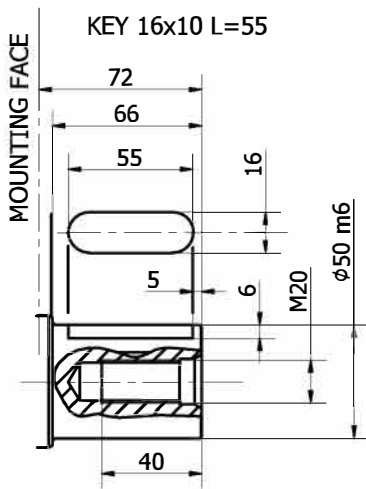


A3

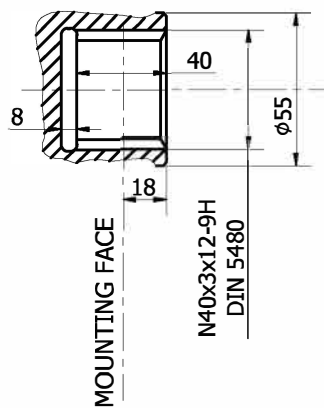

A31

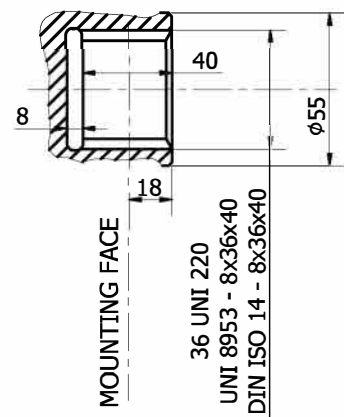

INSTALLATION DRAWING

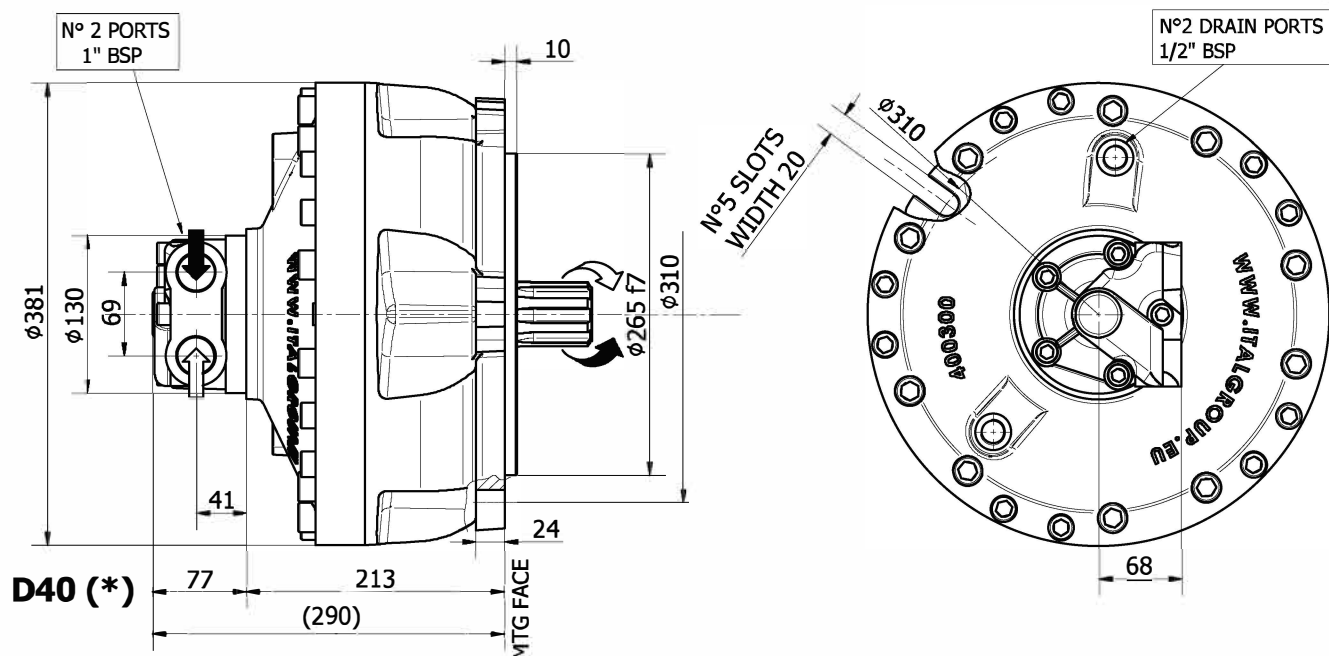






TECHNICAL DATA

		350	400	500	600	700	800
DISPLACEMENT	[cc]	352	426	486	595	689	792
SPECIFIC TORQUE	[Nm/bar]	5,60	6,78	7,73	9,47	11	12,6
MAX. CONT. PRESSURE	[bar]	300	300	300	300	275	275
HYDROSTATIC TEST PRESSURE	[bar]	450	450	450	450	420	420
MAX. CONT. SPEED	[rpm]	800	700	550	500	450	450
PEAK SPEED (***)	[rpm]	1050	900	850	800	800	750
MAX. CONT. POWER (****)	[kW]	98	102	102	102	102	102
MAX. CONT. POWER WITH FLUSHING	[kW]	142	142	142	142	142	142
MAX. CASE PRESSURE	[bar]	10	10	10	10	10	10
DRY WEIGHT	[kg]	92	92	92	92	92	92
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70

- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 82-83) for different distributor interfaces.
- (**) Please refer to the hydraulic fluid recommendations (pag. 8-9).
- (***) Do not exceed maximum continuous power with flushing (pag. 11).
- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.


SHAFTS - HCD3 / G4

SHAFT CONFIGURATIONS

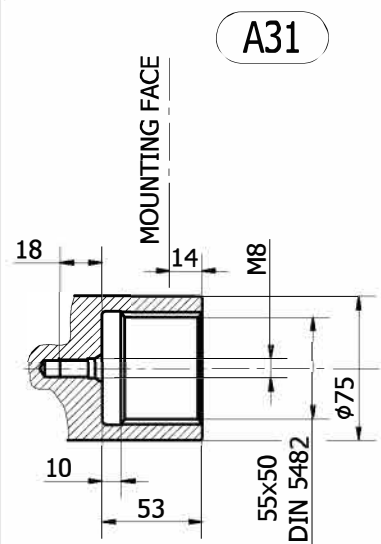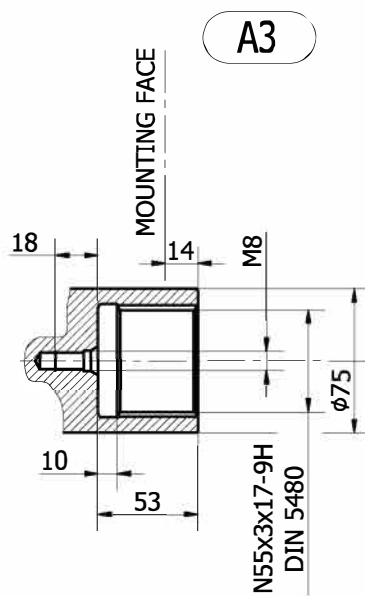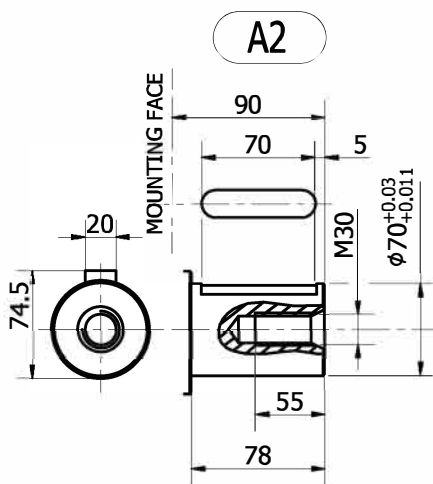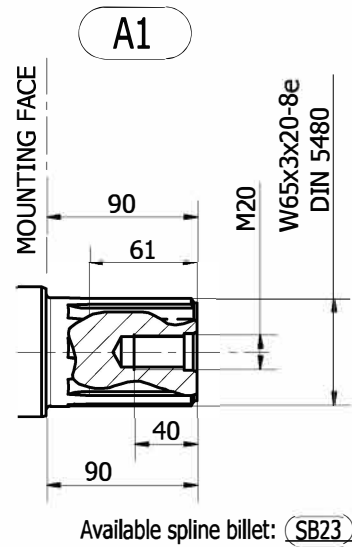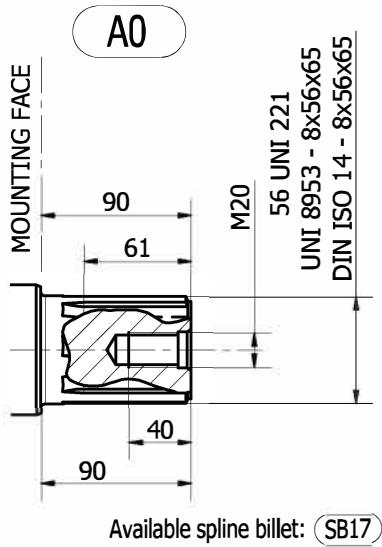


HCD3- PERFORMANCE DIAGRAMS

350 cc

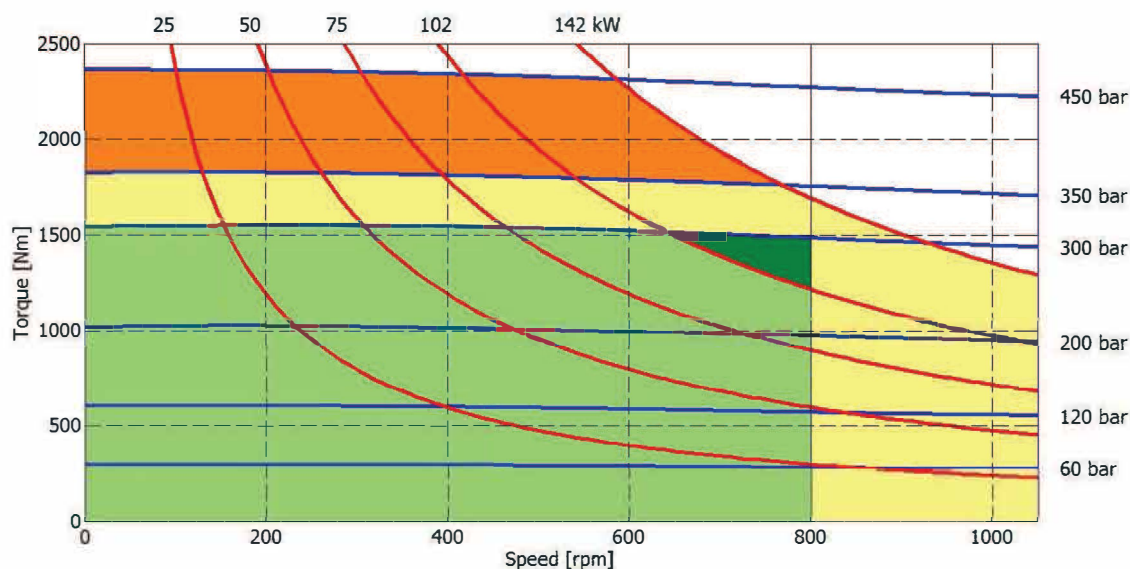

400 cc

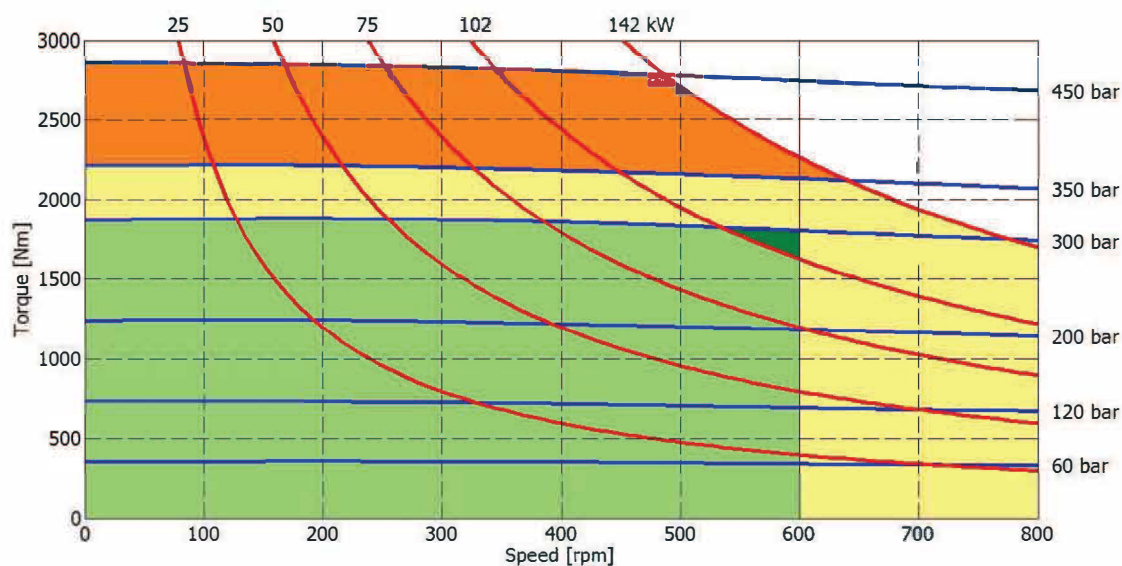


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)


The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.

HCD3- PERFORMANCE DIAGRAMS

500 cc

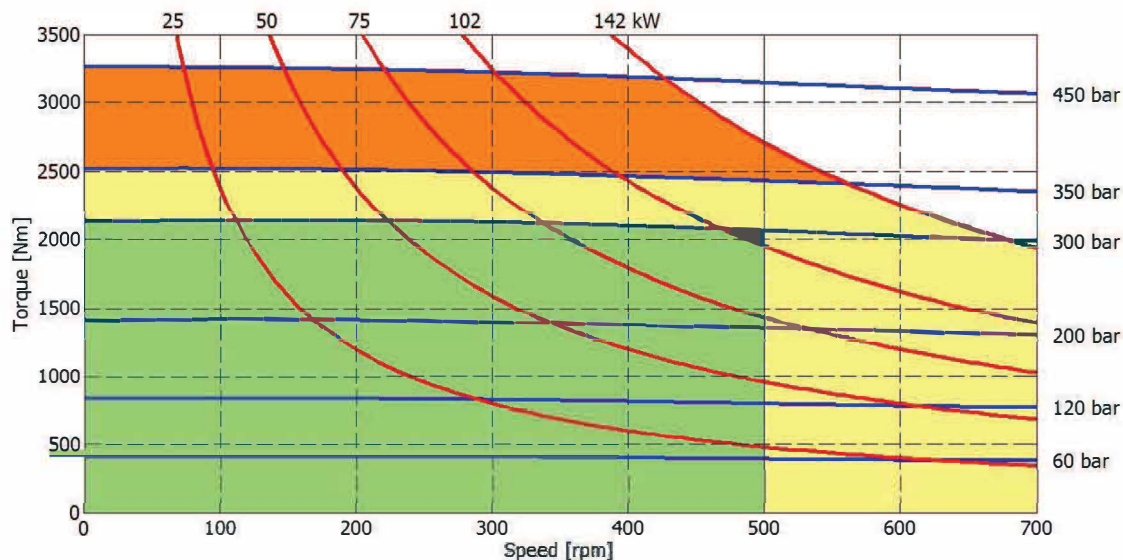

600 cc

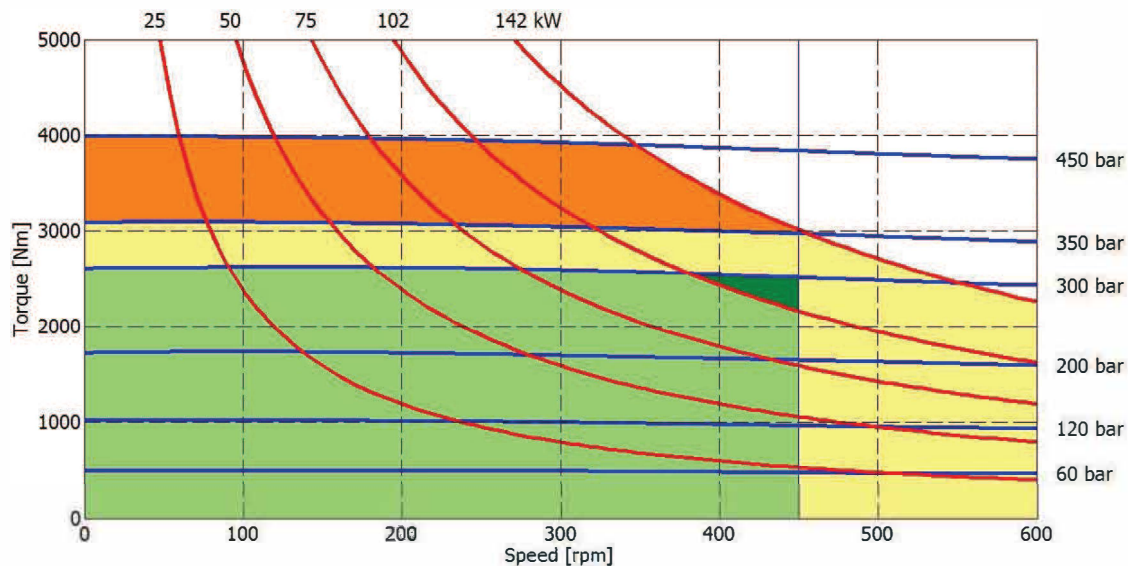


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)


The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.

HCD3- PERFORMANCE DIAGRAMS

700 cc

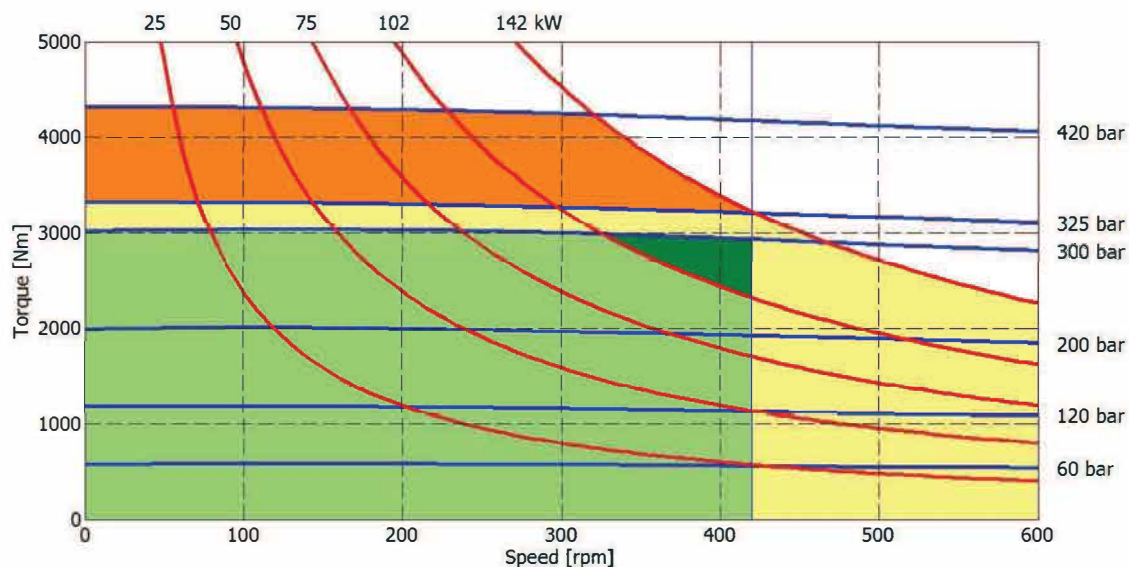

800 cc

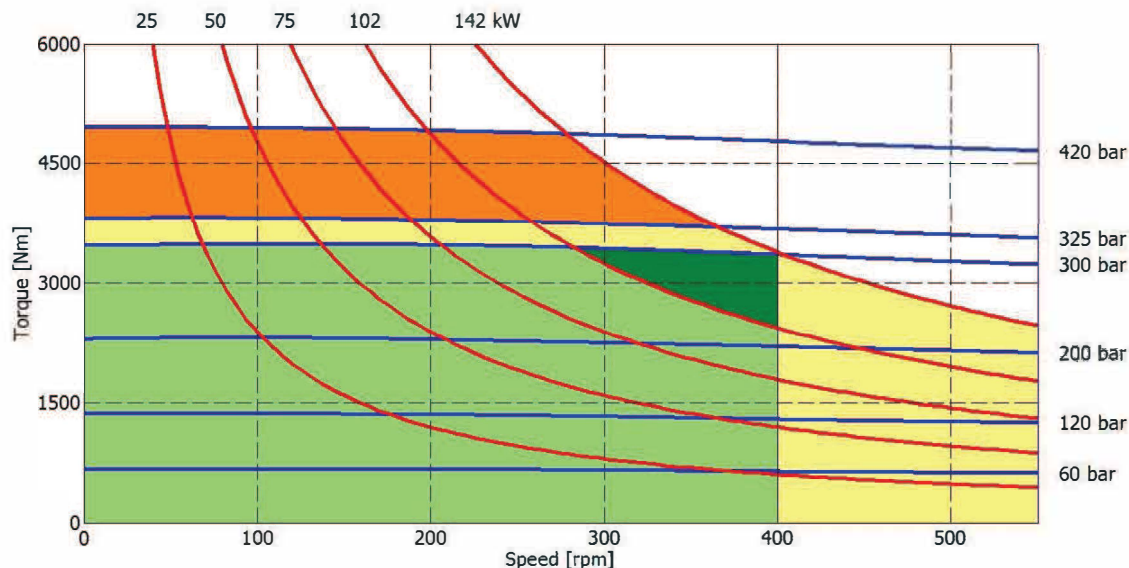


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.

HCD3- PERFORMANCE DIAGRAMS

BEARING LIFE

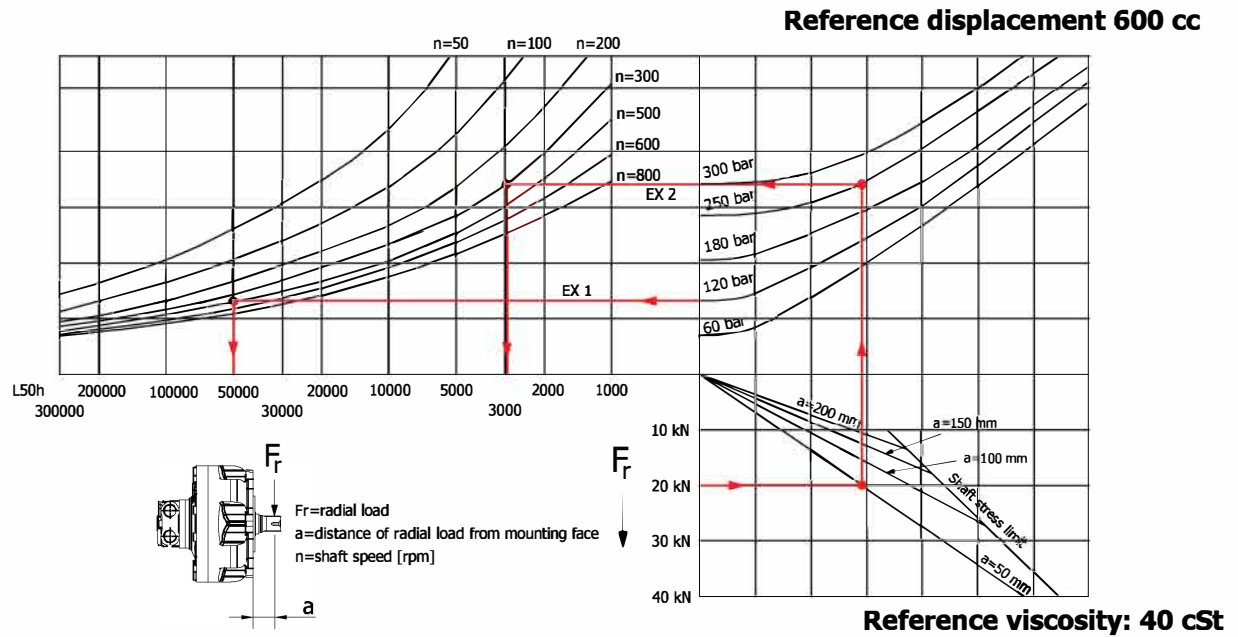

Example:

We suppose (EX1): $p=120$ [bar], $n=500$ [rpm]; we obtain an average lifetime of 50000 [h].

If we suppose (EX2): $F_r=20$ [kN], $a=50$ [mm], $n=300$ [rpm] and $p=250$ [bar] we obtain an average lifetime of 2900 [h].

HCD3 - ORDERING CODE


HCD 3 --- -- -- -- -- SB -

DISPLACEMENT

350 400 500 600
700 800

INTERCHANGEABILITY

/G2
/G4

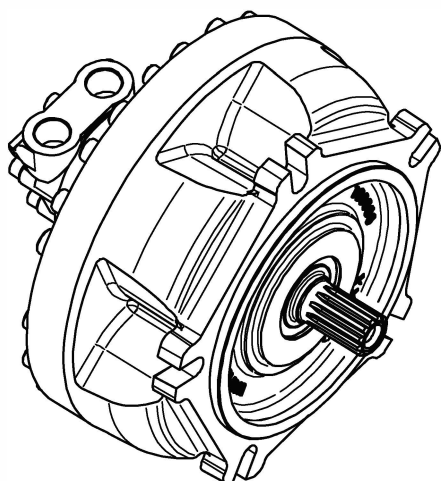

SHAFT

A0 A1
A2 A3
A31

TACHOMETER

J (*)
TA
TB
TT1
TQ1
EST
EST30
EST31

See pag. 84-87

(*) Tachometer predisposition

SPECIAL FEATURES

HSM

See pag. 7

MP

SPSL

HPS

CCW

See pag. 23

Z - -

Italgroup
internal code

DISTRIBUTOR

D31B D36B
D310B D40
D47 D416
D90

See pag. 82-83

SPLINE BILLET

SB3 SB5
SB17 SB22
SB23

See pag. 88